



CUSTOM ROLLING PAPERS

THE TEMPLATE DESIGN INSTRUCTIONS FOR PRODUCT KING SIZE SLIM + TIPS

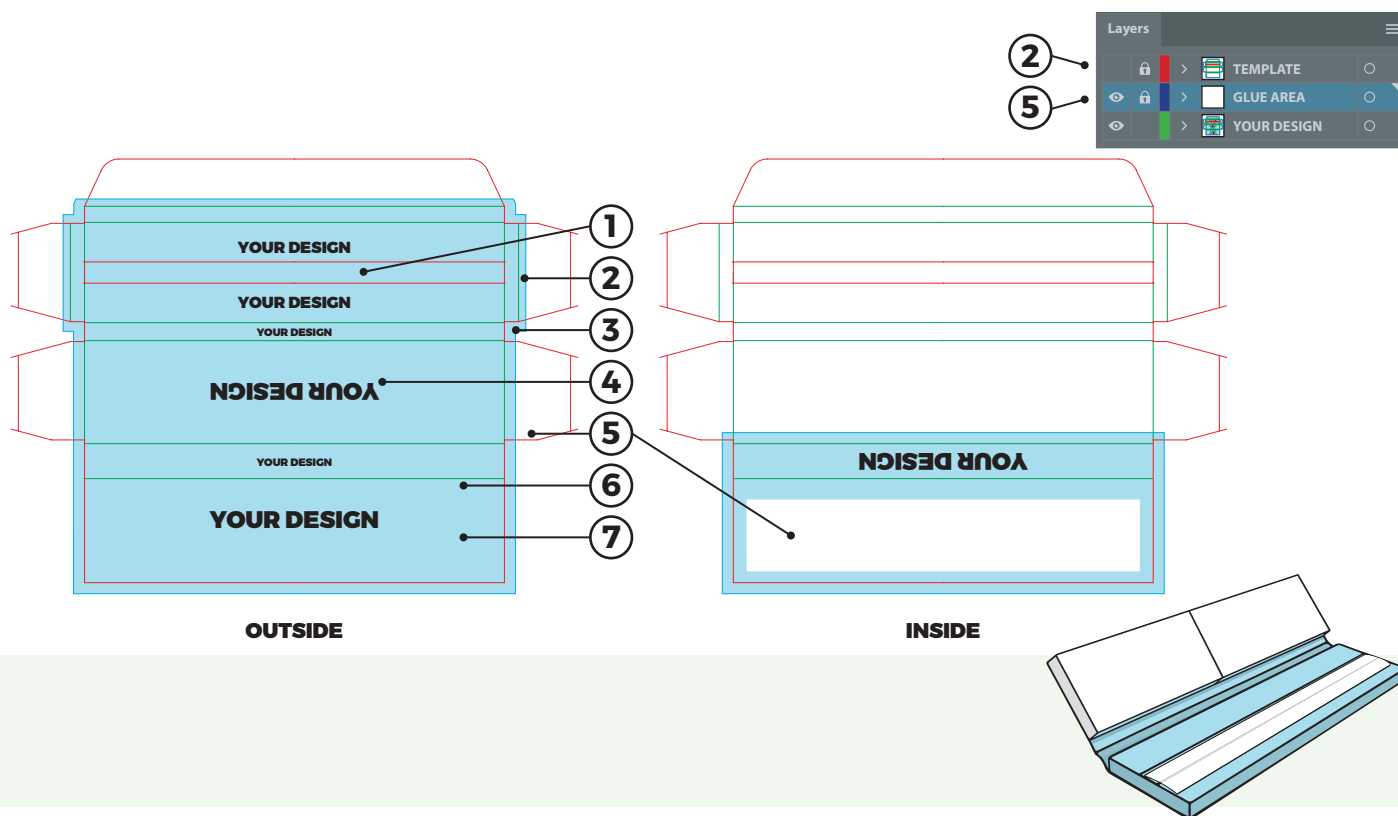

- | | | |
|---|---------------------------|---|
|  | BLUE AREA: | Final product printable design area. |
|  | BLUE LINE: | Bleed line – the background design must be filled to the blue line. |
|  | RED LINE: | Estimated knife cutting line. All important artwork must be placed at least 3 mm inwards. |
|  | GREEN LINE: | Folding line. |
| | BEYOND BLUE LINE: | Non-printing area. |
| | IMAGES: | Images must be attached or embedded (in case of .ai and .eps files) into final design, not just linked. A JPG/JPEG and a PNG format are possible. We recommend a PNG format with 300 DPI. |
| ROLLING PAPER LEAVES SLOT ① | | The slot must be filled with the background design. It will not be visible in the final product. |
| TEMPLATE LAYOUT LINES ② | | The layout lines must not be visible. The template layer must be switched off or removed. |
| BLEED AREA ③ | | Background design must be filled at least 3 mm over the cutting line or at least to the blue line. |
| OUTLINED TEXT ④ | | All text must be in curves. |
| GLUE/BIDING AREA ⑤ | | The glue/biding area must be without design or background. |
| RESOLUTION ⑥ | | Resolution of all design elements must be 300 DPI. |
| COLOUR MODE ⑦ | | Only CMYK colours are possible to print. Contact the sales representative for more options. |
| | TRADEMARKS: | You take full responsibility for the use of trademarks in your submitted design. |
| | FILE FORMATS: | PDF or EPS. |
| | PRINT DIFFERENCES: | Some colour difference is possible. |
| | FINISHED PRODUCT: | We print only in CMYK colours. A colour difference between a screen and a final product is possible. |

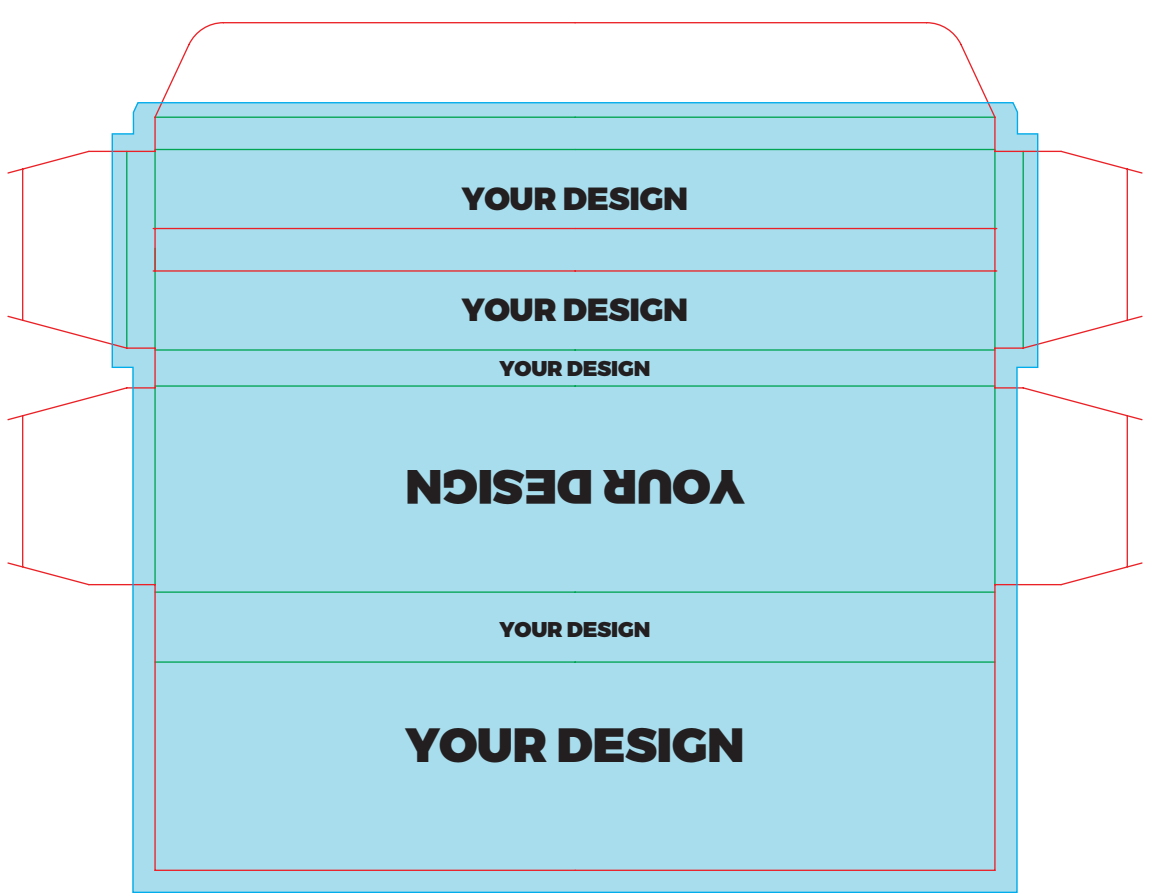

YOUR DESIGN


YOUR DESIGN


YOUR DESIGN

YOUR DESIGN

YOUR DESIGN

YOUR DESIGN

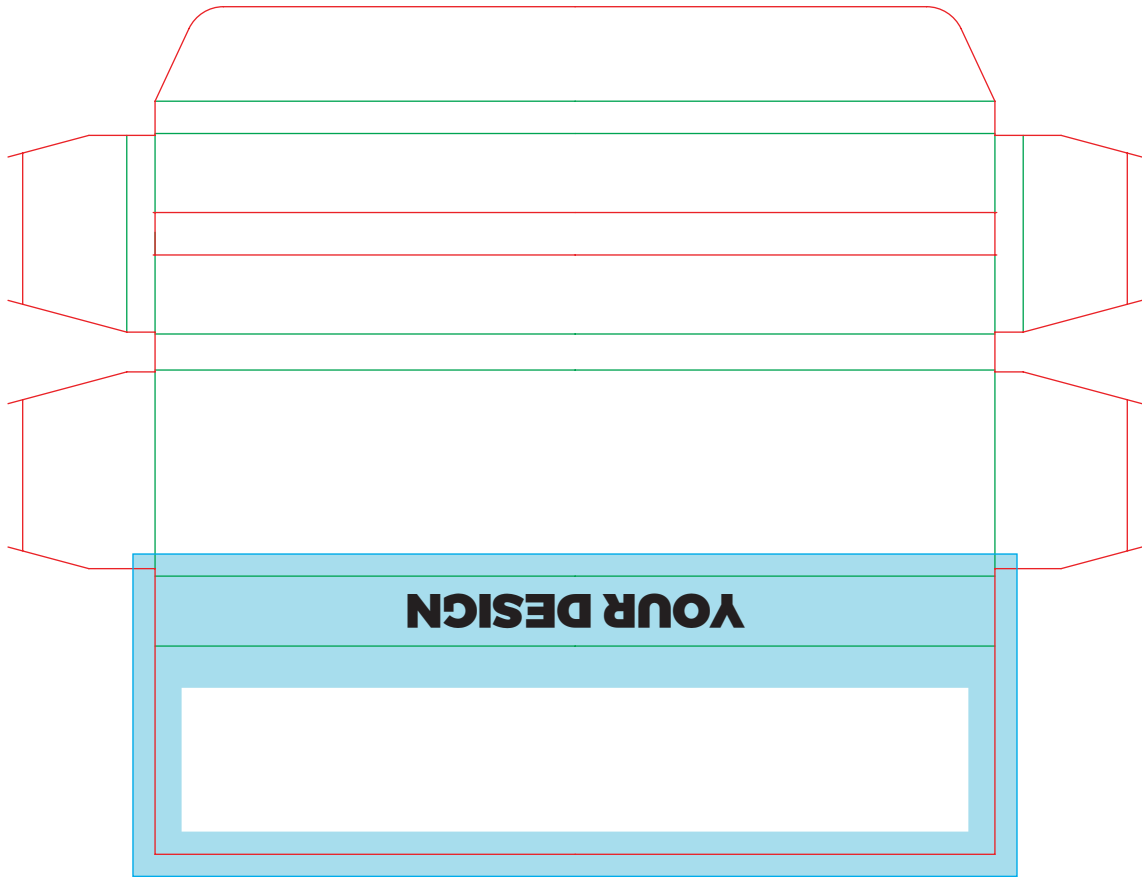

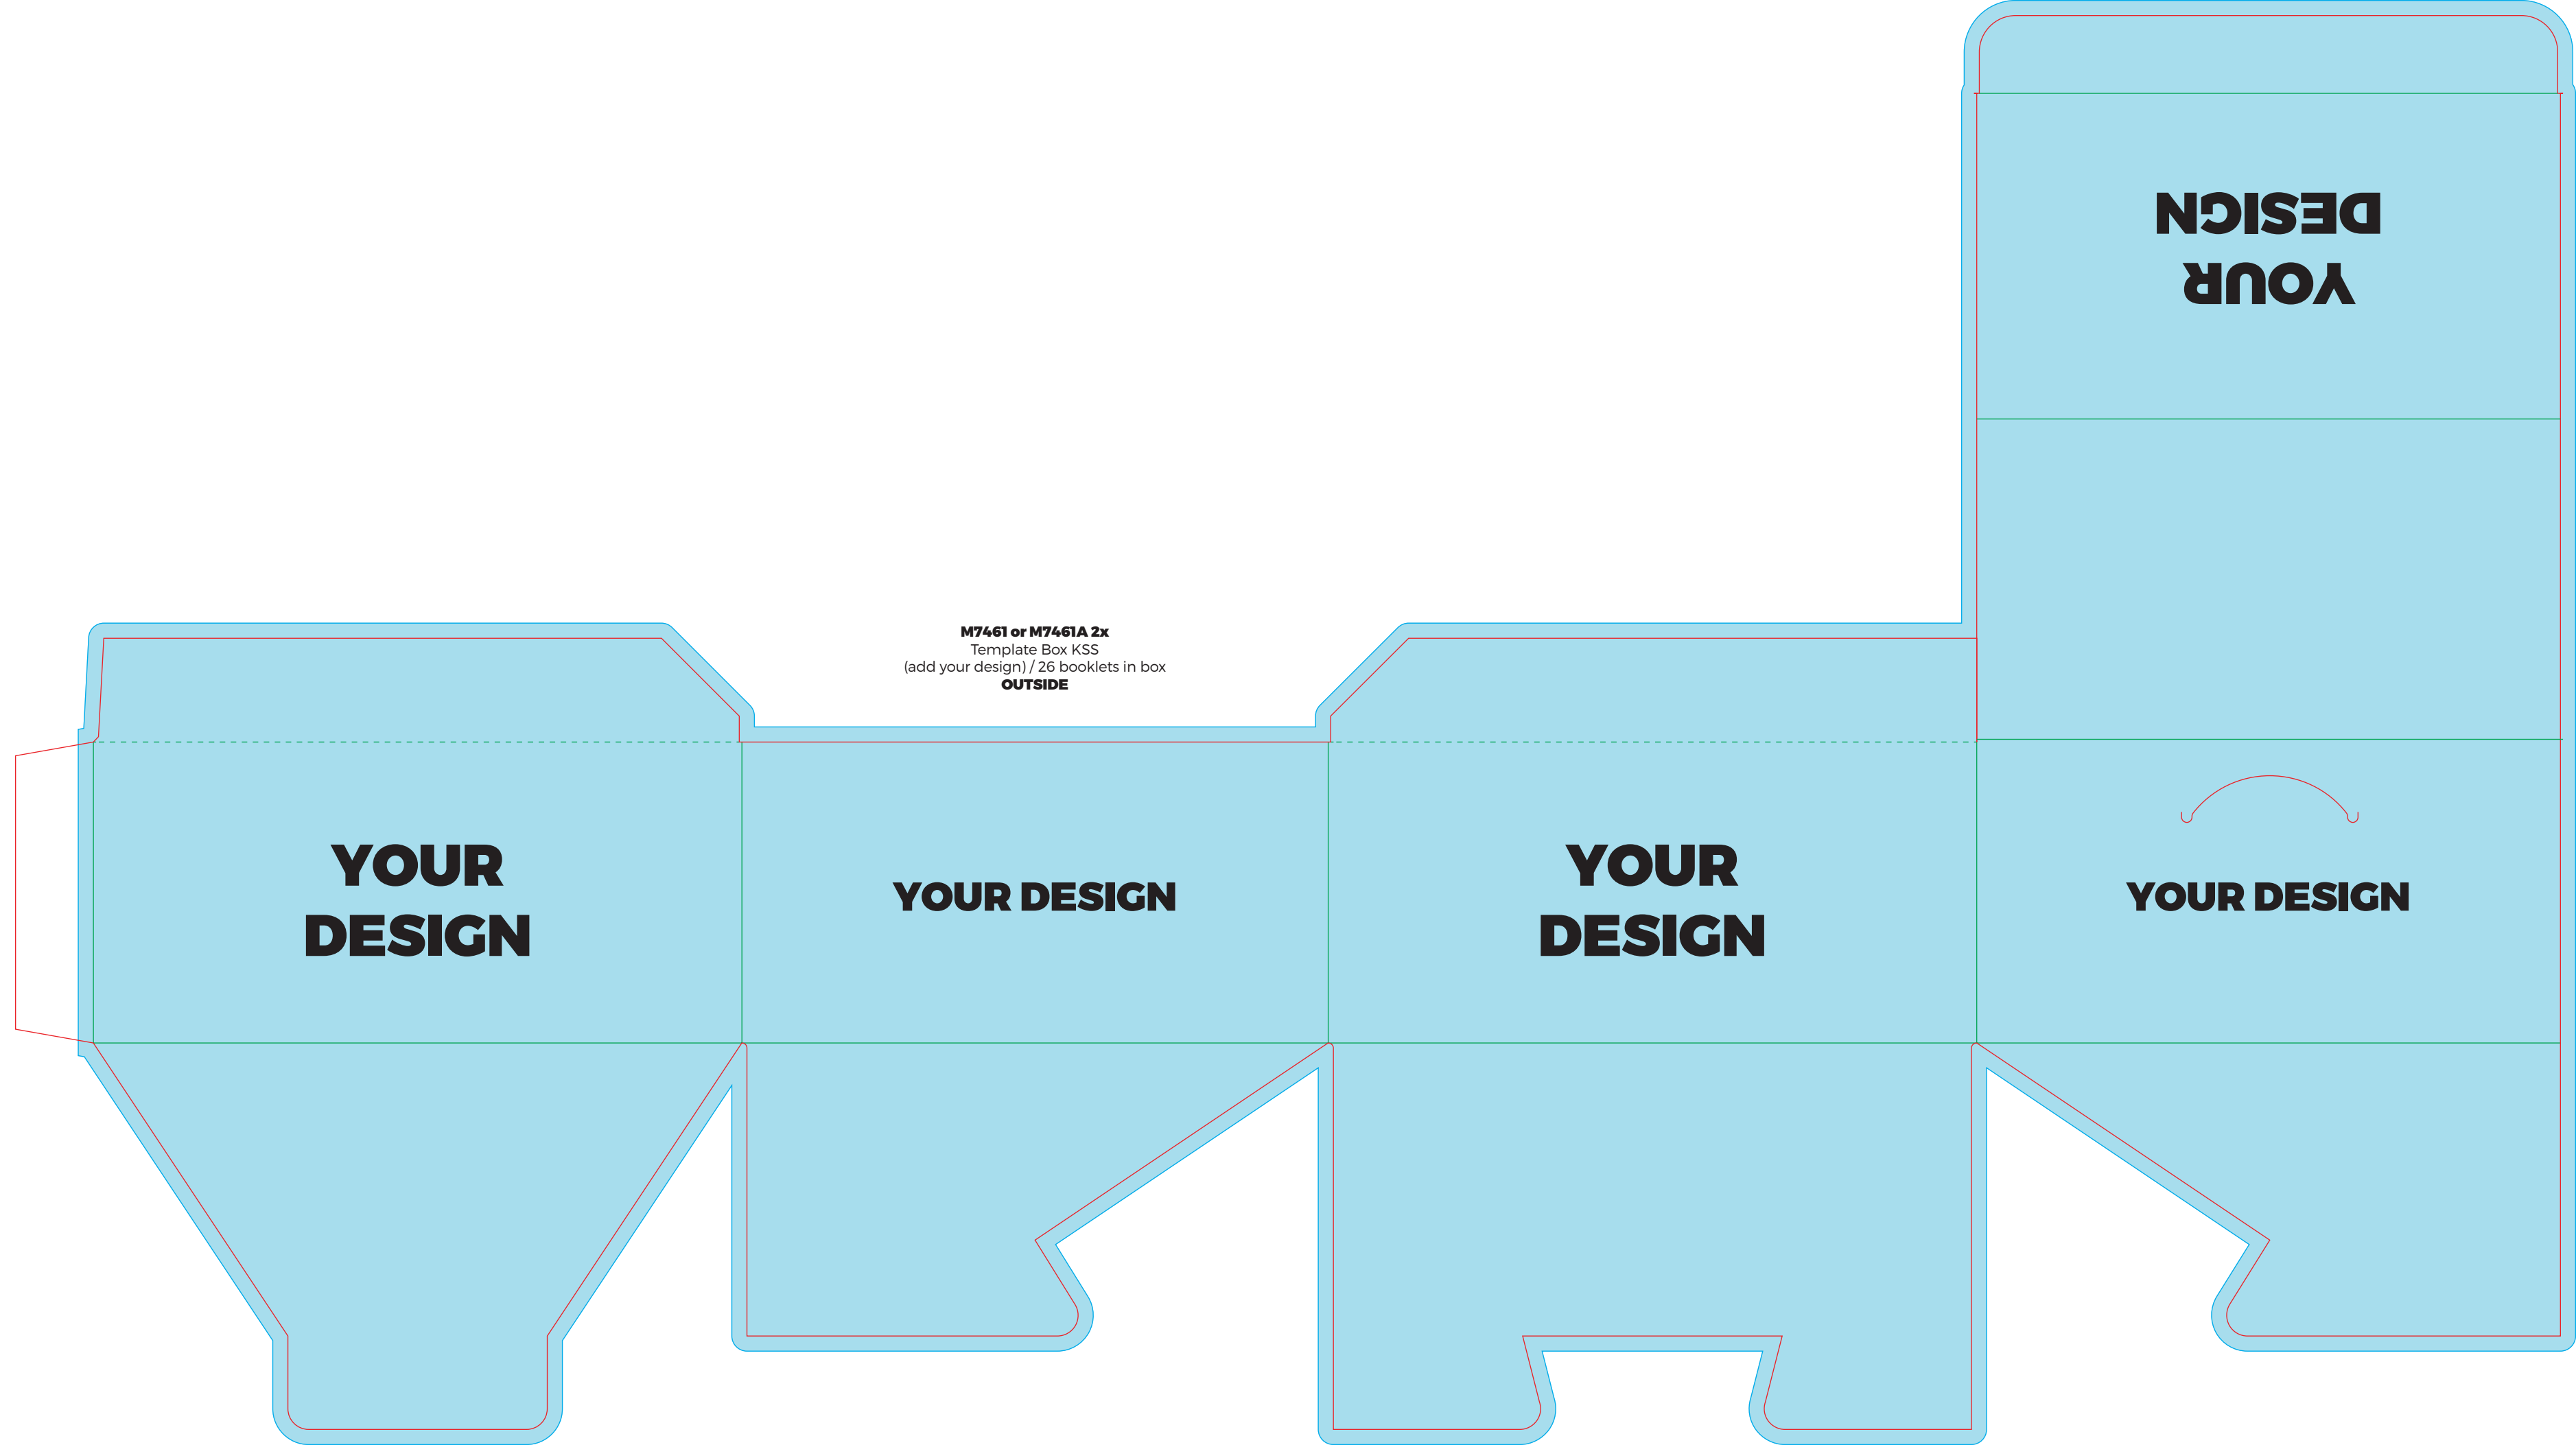

M7461 or M7461A 2x
Template Box KSS
(add your design) / 26 booklets in box
OUTSIDE

**YOUR
DESIGN**

YOUR DESIGN

**YOUR
DESIGN**

YOUR DESIGN

**YOUR
DESIGN**