
2 Eye Pads
Hyaluron-Caffeine
Envelope packaging

Adjustments:

•

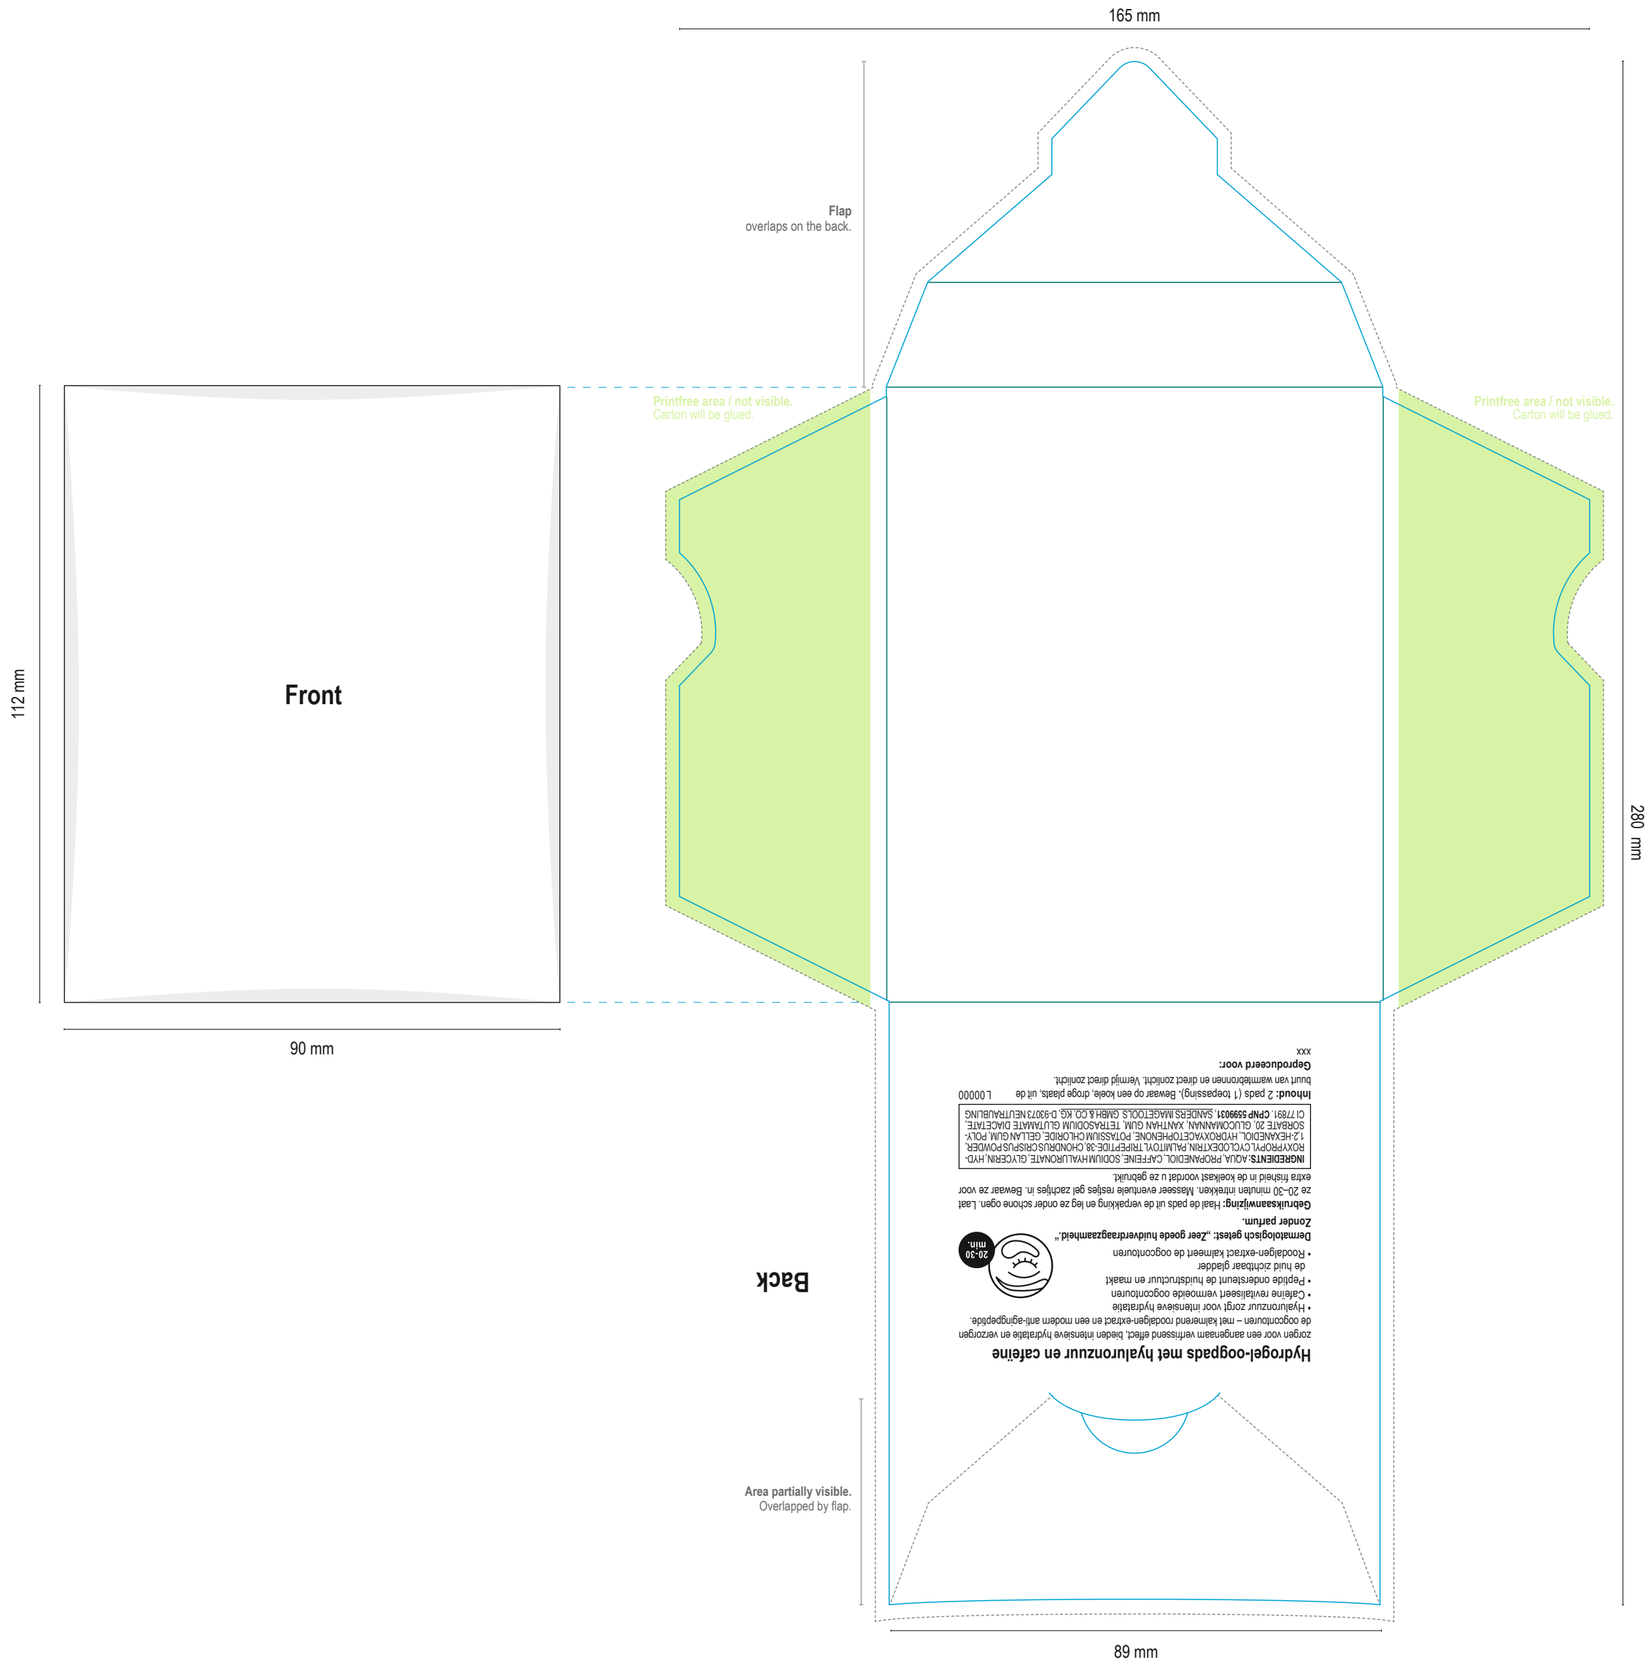

Dimensions

- **Final format punching contour**
  165 mm x 280 mm
- **Bleed:**
  additional 2,5 mm to all sides
- **Non-printing area (will be glued)**
- **Fold**

At « Produced for: xxx »
Company's name, street, country, postcode, city
(either manufacturer, dealer or end customer)

Data delivery

Data processing and printing according to
ICC profile « ISO Coated V2 (ECI) »

Please send us the following contents:
Indesign Layout Paket (File > Package ...)
with all linked images, logos, fonts
Alternatively **Illustrator Layout Package**
+ Screen PDF with punching contour & technical info colours
+ Print PDF without punching contour & technical info colours

Attention: Do not forget a bleed of 2,5 mm to all sides

Layout Guidelines

Continuous envelope packaging printing
Digital Printing 4c CMYK gang run printing process

- **CMYK colour space**
  Do not use special colours or full tone colours
- **Attention:** RGB layout contents are converted to CMYK
  Colour deviations are possible
- **Safety distance 2,5 mm** inside to the punching contour
- **Effective image resolution** at least 300 dpi
- **Minimum line thickness** positive: 0,1 mm | negative 0,15 mm
- **Logos** ideally as vector graphics
- **Continuous envelope packaging printing - Cutting tolerances**
  Print image overhang: Left and right margins of max. 1 mm
  Remedy: Design margins to fade out in the same color
- **Deep Black CMYK (100/100/100/100)** for rich surface printing
- **Black 100% K (0/0/0/100)** for finer lettering & lines
- **Neutral gray (0/0/0/60)** without color casts

Notes

- The gang run printing process may result in colour deviations
- We assume no liability for the readability of QR codes